



Synapse

CDV29



Reference (B&B / Tri-Level) distribution amplifier with 9 outputs and Synapse reference inputs

A Synapse® product



Due to constant product research and development all specifications are subject to change without notice. EVS does not warrant or assume any legal liability or responsibility for the accuracy, completeness, availability and/or delivery of the products and/or services listed in this datasheet. Copyright © 2021 EVS

Block schematic & I/O panel

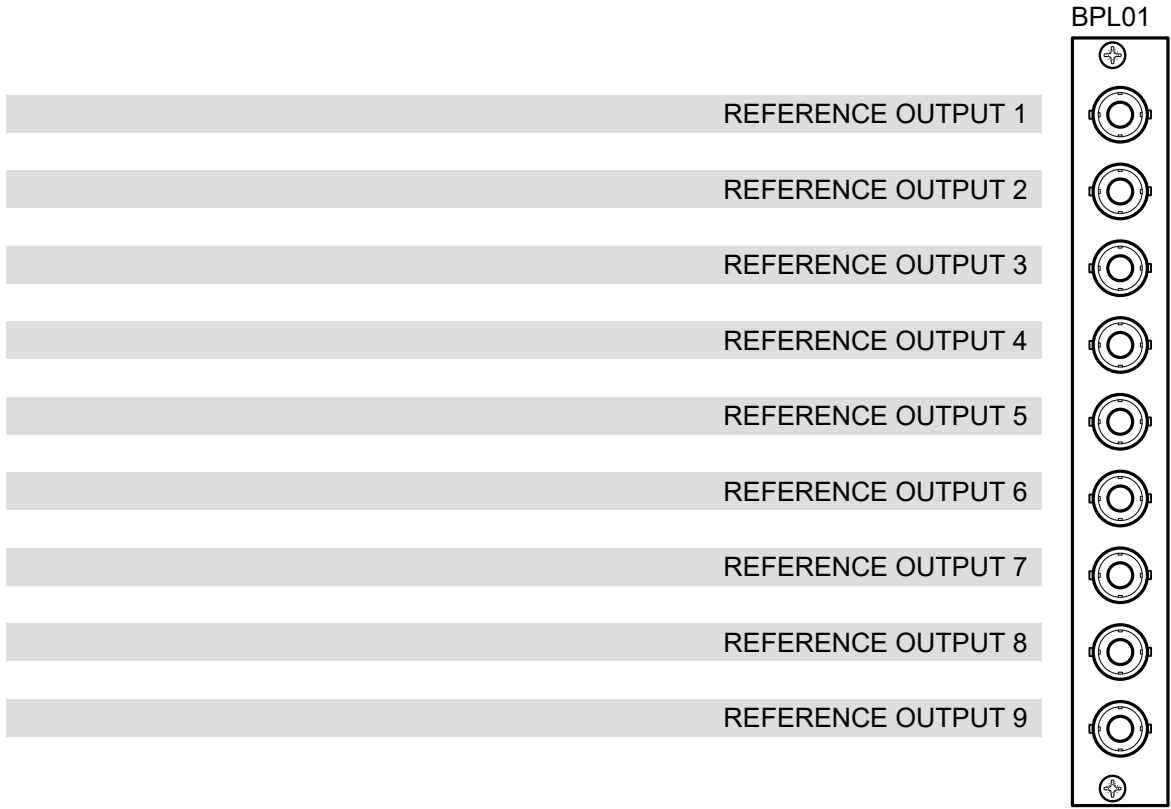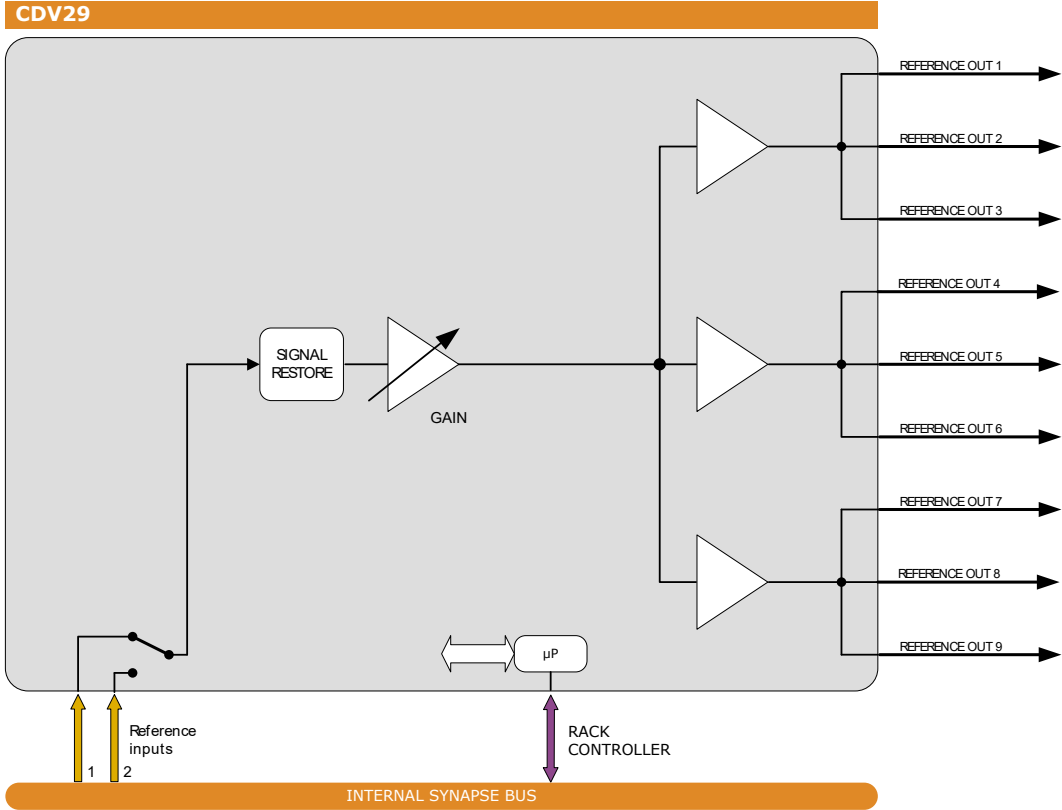

Features & Applications

The CDV29 is a basic analog distribution amplifier providing 9 buffered outputs via the use of the internal Synapse Reference distribution system.

- 9 outputs
- Adjustable input gain
- DC restored
- Compatible with Tri-Level sync
- +/- 6dB gain adjustment
- Back-up functionality. In case of reference loss, the card can automatically switch to other reference input.
- Input status detection
- Full control and status monitoring through the front panel of the SFR04/SFR08/SFR18 frame and the Ethernet port (ACP)

Applications

The CDV29 is designed for applications where a cost effective analog Tri-level or Bi-level (B&B) distribution is needed. The straightforward design enables easy installation and reliable operation.

- Tri-Level Sync distribution

Ordering information

Module:

- **CDV29:** Analog video distribution amplifier with 9 outputs and Synapse reference inputs

Standard I/O:

- **BPL01_CDV29:** I/O panel for CDV29

Specifications

Reference input through RRC

Number of Inputs	2 on SFR18, 2 on SFR08 and 1 on SFR04
Input levels	700 mV. White to black. nominal 1 V sync tip to white. 75 Ohms terminated through loop
Return loss	Measured with Mini Circuits ZFDC-15-6-75 > 40 dB, @ 5 MHz > 36 dB, @ 15 MHz > 28 dB, @ 30 MHz 75 Ohms terminated

Analog outputs

Number of Outputs	9
Output levels	1 V sync tip to white, 75 Ohms terminated
Return loss	Measured with Mini Circuits ZFDC-15-6-75 > 37 dB, @ 5 MHz > 34 dB, @ 15 MHz > 29 dB, @ 30 MHz. Other outputs 75 Ohms terminated

Performance

Frequency response	within 0,4 dB, 0 to 5 MHz.
Signal to noise ratio	66.5 dB. 10KHz to 6MHz, Tektronix VM700T
Bar tilt	0,1 %
Gain stability	1%

Miscellaneous

Weight	Approx. 250g
Operating Temperature	0 °C to +40 °C
Dimensions	137 x 296 x 20 mm (HxWxD)

Electrical

Voltage	+24V to +30V
Power	<4 Watts